


AnoQuick™

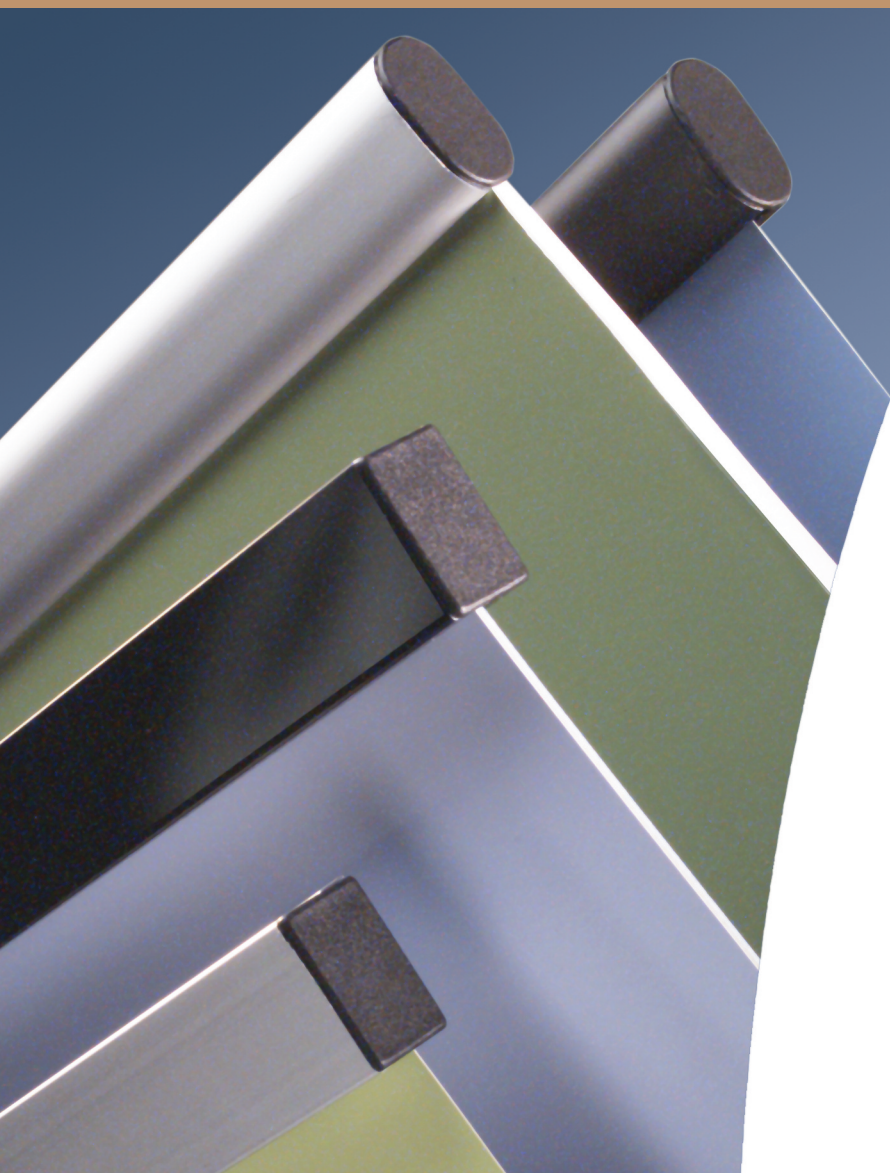


A finished look for a variety of substrates.

AnoQuick's sturdy, durable profile is an ideal solution for most any graphic. This aluminum holder can be used alone for 3/16" foamboard, with AnoQuick Pegs to hold thinner substrates, or with 1/4" dowels for fabric.


- Sturdy enough for permanent or semi-permanent installations.
- Eliminates bowing.
- Create larger displays by connecting multiple lengths.

Always cut to your exact specifications.

Color Options Round Profile

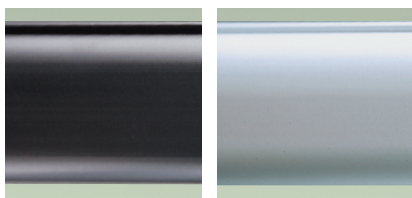


Color Options Square Profile

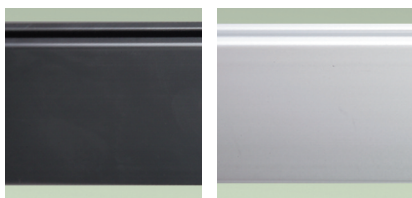

black anodized
aluminum

clear anodized
aluminum

Profiles



Shown actual size

End Caps



06-5525
Round Replacement End
Caps
Black



06-5545-B
Square Replacement
End Caps
Black

2 End Caps are included with each holder.


Used with a standard 1/4" dowel, AnoQuick is perfect for fabric substrates.



AnoQuick, plus the AnoQuick Peg, works with thinner substrates.



AnoQuick is ideal for thick substrates up to 3/16".



*Suction cups are not recommended for use with heavier AnoQuick installations. Call for recommendations.

AnoQuick Accessories



1UP-0101
MultiClip
Black or clear



06-5050
Cable Clip
Black or clear



20-0038
Window Mounts
Clear with black or clear cap



06-SC150H
Suction Cup
Clear with nickel plated steel hook



06-5045
QuickClip
Black, silver or clear



06-6067
Wall Mounting Hanger
Galvanized steel. 1 screw and 2 nails are included for mounting flexibility



06-6068
Slatwall Hanger
Galvanized steel



06-6050-S
Snap-In Wall Hanger
Silver



06-1920
AnoQuick™ Peg
White plastic
Not reusable




06-2930*
AnoConnectors™
Galvanized steel
Used to connect multiple AnoQuick holders.



97-0472
Snap-In Off-the-Wall Hanger
Silver Hanger, Black, clear or champagne anodized aluminum pole
Pole length: 3" to 12", Call for Pricing.

AnoQuick Substrate Possibilities

minimum thickness	inches	millimeters	points
equivalent to: penny	1/16"	1 1/2 mm.	60 pt.
 These thicknesses require the use of the AnoQuick Peg.	1/8"	3 mm.	125 pt.
	3/16"	5 mm.	188 pt.
maximum thickness equivalent to: 3.5 floppy disk			

Sizes reflect combined laminate and substrate thickness.

AnoQuick

12A300

Graphic width between

12"	20"
21"	30"
31"	40"
41"	50"
51"	60"
61"	80"
81"	97"
110"	
121"	

All AnoQuick orders are cut to your exact specifications. For other sizes, call for pricing.

Technical Information

AnoQuick presses easily onto foamboard edges where total thickness of board, image and protective laminate is equal to 3/16".

For rigid substrates like Sintra use the AnoQuick Peg for maximum security. For pocketed banners, dowels are available. Call for pricing.

Stock finishes are black, and clear anodized aluminum. Custom colors also available; 10,000 ft. minimum and an up charge may apply. Wood finishes are available and we can match most colors. Minimum quantities apply. Call for pricing.



06-5565-G*
Cable End Caps
Light Grey

Cable end caps must be used with a cable stop no larger than 5/8" diameter by 1/2" tall.

For proper sizing, your graphic should be 1" less than the space between your cables.

Cable end caps can only be used with the round profile.

Test prior to rollout.