
EconoTrim[™]

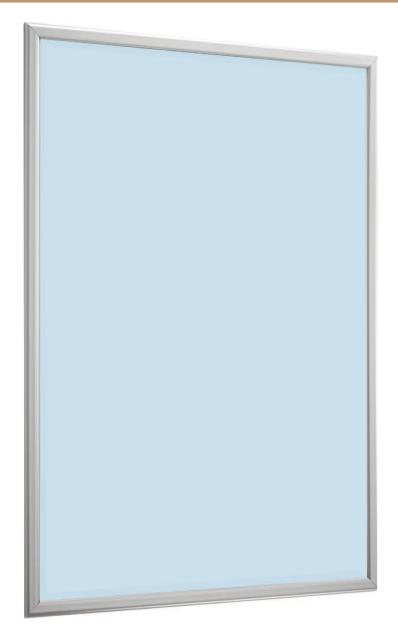

EconoTrim Meets Fixture -A Match Made in Heaven

The new EconoTrim provides you with an easy, stylish, and inexpensive way to mount signage directly to your fixture. Its tool-free assembly and adhesive-backing make it easy to mount to most any flat surface. Plus, the EconoTrim is always cut to your size making it easy to fit onto your unique fixture design.

- Unique plastic design makes mounting your signage inexpensive.
- Adhesive-backing makes it easy to attach to almost any fixture.
- Patent-pending back-lip on rail makes it easy for store staff to slide graphics in and out for changing.
- Always cut to match the exact graphic size you need for your distinct fixture

Color Options



black with mitered

corners

12FT100

12ET100 silver with mitered corners




12ET200 black with rounded



12ET200 silver with rounded corners

Substrate Possibilities Substrates should be rigid or semi-rigid. For thin, flexible substrates use backer boards or clear protective liners, sold separately. Please call for details. inches millimeters points maximum thickness equivalent to: 3.5" floppy disk 3/32" 2 mm. 80 pt.

Sizes reflect combined laminate and substrate thickness.

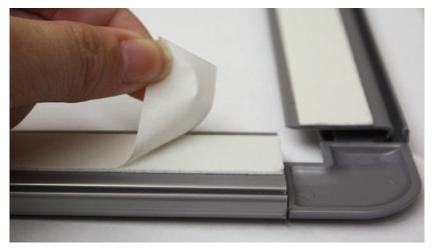

Adhesive-backing makes it easy to attach to almost any fixture.

EconoTrim Accessories



12-0306 .030 PETG Liner Clear 8.5" x 11"

22" x 28"

36" x 48"

Other sizes available. Call for pricing.

EconoTrim Example 12ET100 & 12ET200

Example Graphic Size

Mitered

8 1/2" x 11"

22" x 28"

24" x 36"

Rounded

8 1/2" x 11"

22" x 28"

24" x 36"

Note: All prices listed are based on a sideload frame. Please call for top-load pricing.

Live Area Calculator

12ET100





Graphic 8.5" x 11"

Live Area 7.25" x 9.75"

"Live area" is the amount of your graphic actually shown when placed in a frame. When you put a graphic into an EconoFrame, a 5/8" margin is covered by the frame.

Technical Information

Substrates should be rigid or semi-rigid. Black EconoTrim is not recommended for use in areas receiving direct sunlight.

Graphic size minimum for miter cut frame is 5" \times 5". Minimum for rounded corner frames is 5.25" \times 5.25".

Maximum length for loading side is 36" for miter or rounded corners. Maximum size for non-loading side is 120".

Black or silver plastic. Custom colors also available; 10,000ft. minimum and an up charge may apply. Call for pricing.

Available with miter cut corners or rounded corners. Rounded corners available in black and silver to match the frame.

Protective liners sold separately. Call for details.

Assembly required.
We can assemble for an additional fee.