Command attention, invite engagement—and show your products at their best.





AnoGlow[™] **LED lightboxes** are designed specifically to meet the needs of store planners, designers, and visual merchandisers. Make your graphics—and your products—look their absolute best.

- The most evenly-lit and brightest lighting—no dark or hot spots
- Minimalist design and ultra-thin profiles keep attention on your message where it belongs
- Patented Springless Snap Rail makes graphic change-out easy no risk of lost springs or slack rails
- Get the exact sizes you need, in days not weeks, no minimums required
- Renowned service team assures on-schedule, trouble-free rollouts
- Superior craftsmanship & construction reflect the quality of your brand
- Backed by our 5-year warranty the longest in the industry



New level of visual impact and consumer appeal



Advanced installation and usability features



Expertise you can count on for maximum ROI



Flexible Installation Options



Wall | Configure to any mounting application: side-by-side, recessed (shown), or surfacemounted using a variety of available solutions from our full line of mounting accessories.



Fixture | Complement any existing merchandising system with recessed or surface-flush mounted solutions.




End Cap | Customize fitment according to specific fixture and bracketing specifications.



exclusive SmartStand™ interactive display, the fast, easy, and surprisingly affordable way to bring omnichannel experiences in store.



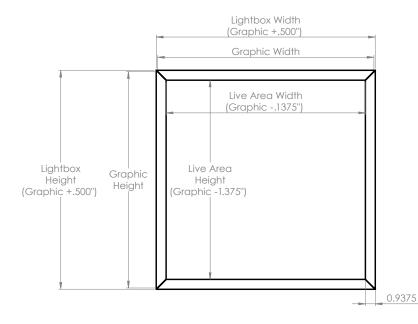

0.891

ORDERING OPTIONS

☐ Snap, Front-Load

Graphic Dimensions

Width x Height:_

Orientation

- ☐ Portrait
- ☐ Landscape

Finish

- ☐ Silver (Clear) Anodized Aluminum
- ☐ Black Anodized Aluminum

LED Color Temperature

- ☐ 6,500K (cool white)
- ☐ 4,100K (warm white)

Plastic Insert (PETG)

- ☐ Clear .020" (best for maintaining image sharpness & securing thinner graphics)
- Matte .020" (best for reducing glare and securing thinner graphics)

Mounting Type

- ☐ Wall/surface mount (standard)
- ☐ For other mounting scenarios, contact us

TECHNICAL INFORMATION

Depth | 0.891" (23 mm) ADA-compliant

Minimum Size | 8" x 8" (20.3 cm x 20.3 cm)

Maximum Size | Up to 48" x 96" (122 cm x 244 cm), portrait or landscape

Weight | Approximately 3.0 lbs per sf

Graphic Loading Options | Front snap-loading

Frame Rail Width | 0.9375"

Finish Options | Silver (clear) or black anodized aluminum standard, no minimum quantities (custom colors available, minimum quantities and upcharge apply, call for pricing)

Maximum Graphic Thickness | 0.040" (1.0 mm); an optional clear PETG insert can be used to accommodate graphics less than 0.020" thick

Warranty | 5-year limited warranty

LED Service Life | Ultra-bright LEDs provide 50,000 hours of continuous service

Electrical | 12VDC, external power supply utilizing 120-240VAC input voltage, and 60" AC power cord included with every lightbox

- 60W power supply: 1.4A, 140 Watts, with lightboxes up to 60" in height or width
- 90W power supply: 2.0A, 200 Watts, with lightboxes over 60" in height or width

Rating | For indoor use only, dry locations

All frames conform to UL 48 for US and CSA 22.2 No. 207 for Canada (E352162)



Another Patented Rose Displays Exclusive

This AnoGlow™ product is protected by patents: 8,196,325; 8,578,641; 9,038,301

rosedisplays.com

