Invite engagement from inside and outside your store.







AnoGlow[™] **LED lightboxes** are designed specifically for store planners, designers, and visual merchandisers. Make your graphics—and your products—look their absolute best.

- The first two-sided, slide-in LED lightbox keeps attention on your message, within an ultra-thin profile
- The most even lighting and ultrabright LEDs showcase your graphics with no dark or hot spots
- Changing even the thinnest graphics is easy in windows and tight spaces
- Electrical power delivered over thin, barely visible hanging cables

- Get the exact sizes you need, no minimums required, in days not weeks
- Renowned service team assures on-schedule, trouble-free rollouts
- Superior craftsmanship & construction reflect the quality of your brand
- Backed by our 5-year warranty the longest in the industry



New level of visual impact and consumer appeal



Advanced installation and usability features



Expertise you can count on for maximum ROI

rose displays

Advanced Engineering for Greater Flexibility and Exposure



Window | Generate interest and invite shoppers into your store with illumination on one or both sides for greater impact.



SmoothSlide[™] Graphic Loading | Even the thinnest of graphics can be changed easily, in virtually any space without snagging or bending.




Thinvisible™ Conductive Hanging System Delivers electrical power over thin hanging

Delivers electrical power over thin hanging cables; this ideal solution eliminates unsightly power cords, achieving a cleaner look and simplifying installation.



Mid-Store | Capture attention from all angles and locations within your store that attracts shoppers to featured areas. Hanging installation with our eyelets or Thinvisible™ power cables create a clean and unique display.

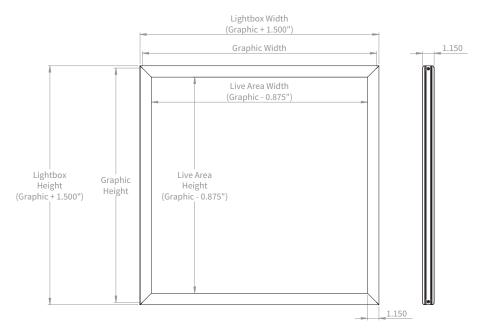

ORDERING OPTIONS

Loading

☐ Snap, Front-Load

Graphic Dimensions

Width _____ x Height:____

Orientation

- ☐ Portrait
- ☐ Landscape

Finish

- ☐ Silver (Clear) Anodized Aluminum
- ☐ Black Anodized Aluminum

LED Color Temperature

- ☐ 6,500K (cool white)
- 4,100K (warm white)

Plastic Insert (PETG)

- ☐ Clear .020" (best for maintaining image sharpness & securing thinner graphics)
- ☐ Matte .020" (best for reducing glare and securing thinner graphics)
- ☐ None

Mounting Type

- ☐ Integrated Thinvisible powered hanging cables (10' each, can be shortened on site)
- ☐ Standard hanging with eyelets and separate power cable
- ☐ For other mounting scenarios, contact us

TECHNICAL INFORMATION

Depth | 1.15" (29 mm)

Minimum Size | 11" x 11" (28 cm x 28 cm)

Maximum Size | Up to 48" x 48" (122 cm x 122 cm)

Weight | Approximately 3.3 lbs per sf

Graphic Loading Options | Top- or side-loading

Frame Rail Width | 1.15"

Finish Options | Silver (clear) or black anodized aluminum standard, no minimum quantities (custom colors available, minimum quantities and upcharge apply, call for pricing)

Maximum Graphic Thickness | 0.040" (1.0 mm); two clear liners are included

Warranty | 5-year limited warranty

LED Service Life | Ultra-bright LEDs provide 50,000 hours of continuous service

Electrical | 60W external power supply, 1.4A, 140 Watts, 12VDC, utilizing 120-240VAC input voltage, and 60" AC power cord included with every lightbox

Rating | For indoor use only, dry locations

All frames conform to UL 48 for US and CSA 22.2 No. 207 for Canada (E352162)



Another Patented Rose Displays Exclusive

AnoGlow™ products are protected by patents pending.

rosedisplays.com

